
Raychem Molded parts CUSTOMER DRAWING


264W012

Issue: 3

a) Part as supplied.

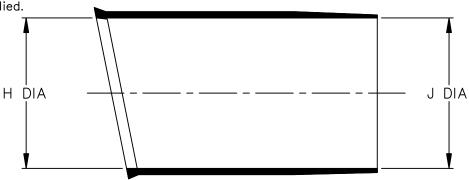

b) Part after unrestricted recovery.

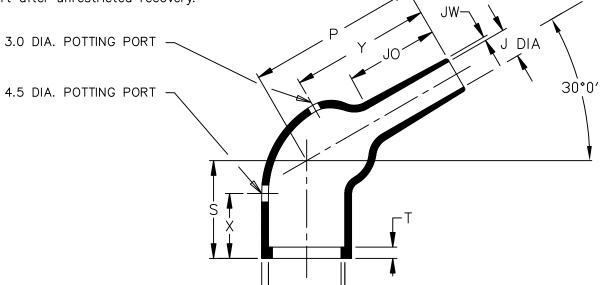

H DIA

DIMENSIONS in millimetres {in inches, for reference}

	ŀ	Н		J	Р	S	Т	U	JO	HW	JW	X	Υ
Part No.	Min	Max	Min	Max	Min	Min	±10%	±10%	±10%	±20%	±20%	±20%	±20%
	а	b	а	b	а	а	b	b	b	b	b	b	b
264W012	36 {1.42}	21.4 {0.84}	36 {1.42}	8.3 {0.33}	46 {1.81}	26 {1.02}	3.0 {0.12}	1.0 {0.04}	25 {0.98}	1.8 {0.07}	1.0 {0.04}	26 {1.02}	37 {1.46}



TE Connectivity

Copyright(!)2017

The copyright in this drawing is the property of TE Connectivity UK Ltd. The drawing is issued on the condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of TE Connectivity UK Ltd.

Drawn A.LILLEY. Checked SSUE 3 Date February 2005 Conforms to ISO Recommendations

Approval Design

MKTG.

Q.A.


3rd Angle Projection Not to Scale



Raychem Molded parts CUSTOMER DRAWING

264W012 Issue: 3

ISSUE	DATE	ECO No.	DESCRIPTION			
2	2/2005	****	REDRAWN			
3	3/22/2017	ECO-17-004018	REVISED ORDERING INFO			

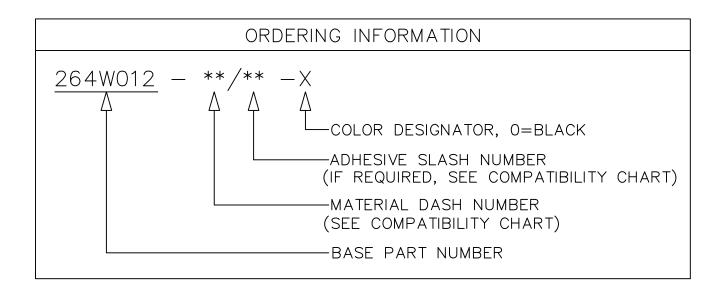

	COMPATIBILITY CHART							
MATERIAL DASH No.	MATERIAL DESCRIPTION	SPEC Number	ADHESIVE COATING SLASH No.					
-3	POLYOLEFIN, SEMI-RIGID	RT-301, RK-6703	/42, /86, /180					
-4	POLYOLEFIN, FLEXIBLE	RT-1304, RK-6704	/42, /86					
-6	SILICON	RT-602, RK-6706	N/A					
-25	ELASTOMER, FLUID RESISTANT	RT-1325, RK-6713	/42, /86, /225					
-130	POLYOLEFIN, COMMERCIAL FLEXIBLE	RW-2008	/42					

NOTES:

1. AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS. WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

TE CONNECTIVITY UK LTD.
FARADAY ROAD
SWINDON, WILTSHIRE, SN3, 5HH
ENGLAND
CAGE CODE: K1010

TE CONNECTIVITY CORPORATION. 501 OAKSIDE AVE REDWOOD CITY, CA 94063 USA CAGE CODE: 06090

