PANDUIT P/N	WEIGHT
ACB02	0.1kg

SPECIFICATION:

1. STANDARD

OPERATING TEMPERATURE RANGE:	0°C TO 65°C [32°F TO 149°F]
OPERATIONAL VOLTAGE:	5 ±0.1 VOLTS
CURRENT DRAW:	30 mA MAX
INTERFACE PLUG 1 (ACCESS HUB):	H.R A2006 SERIES 2.0mm PITCH SINGLE ROW CONNECTOR 10 CIRCUITS
INTERFACE PLUG 1 HOUSING MATERIAL:	NYLON
INTERFACE PLUG 1 HOUSING COLOR:	WHITE
INTERFACE PLUG 2 (ELECTONIC LOCK):	HIROSE DF11 SERIES 2.0mm PITCH DOUBLE ROW CONNECTOR CRIMPING SOCKER, 6 CIRCUITS
INTERFACE PLUG 2 HOUSING MATERIAL:	NYLON
INTERFACE PLUG 2 HOUSING COLOR:	BLACK
INTERFACE PLUG 3 (CARD READER):	H.R C3030HM SERIES (MICROFIT) 3.0mm PITCH DOUBLE ROW CONNECTOR WITH PANEL MOUNT EARS, HALOGEN-FREE, 4 CIRCUITS
INTERFACE PLUG 3 HOUSING MATERIAL:	NYLON
INTERFACE PLUG 3 HOUSING COLOR:	BLACK

2. ADDITIONAL:
   NONE
3. ACCESSORY COMPONENTS:
   INSTALLATION GUIDE, QTY:(1)

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART

IDENTIFICATION

PART NUMBER	DESCRIPTION
ACB02	HARNESS FOR ACE02/ACE03 - COLD AISLE

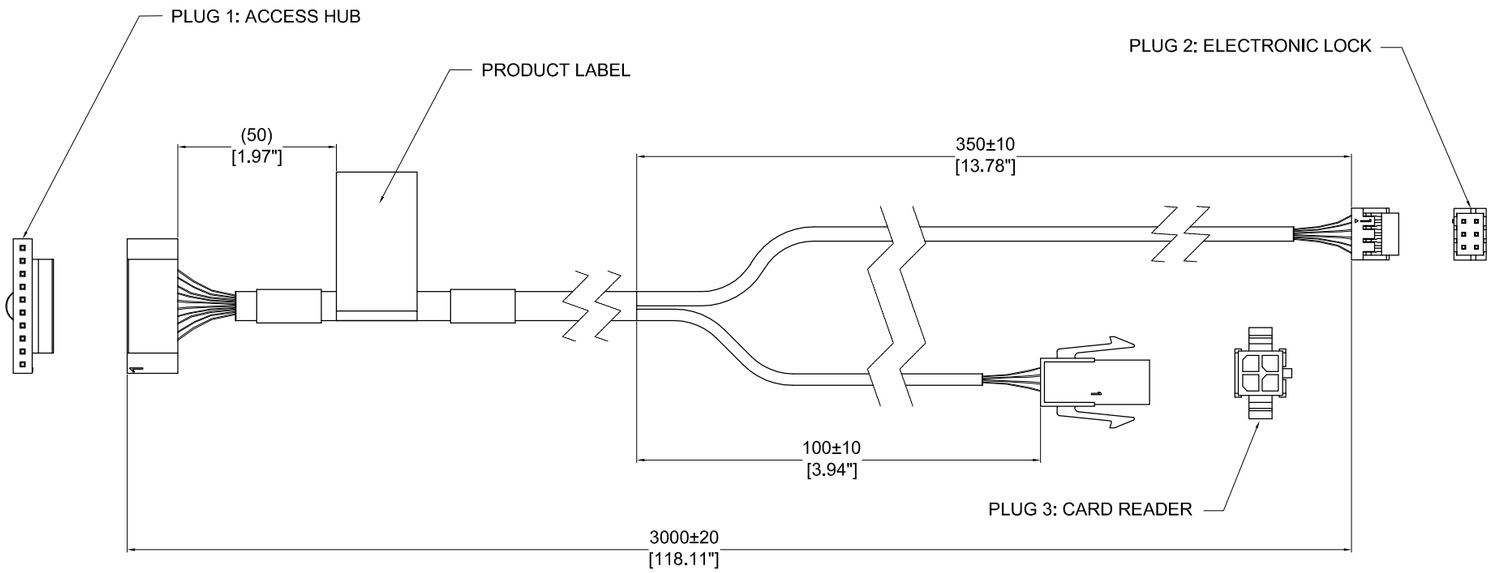

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	01/04/2018	Felix	MIM	DJB	INITIAL RELEASE	ACB02

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL, PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN
DATE
PRINT

TITLE:
SMARTZONE G5
HARNESS FOR ACE02/ACE03 – COLD AISLE
CUSTOMER DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

PANDUIT

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

	Wire Harness Tolerance(mm)
0<L<500	±10
500<L<2000	±20
2000<L<6000	±50

THIRD ANGLE PROJECTION

MATERIAL/COLOR: N/A

DRAWING NUMBER: ACB02_DC

DRAWN BY	DATE	CHK	SCALE		SCALE
Felix	01/04/2018	MIM	NONE	SHT 1 OF 1	B