



TBC Series



CWR15 MIL-PRF-55365/12 Established Reliability, COTS-Plus & Space Level

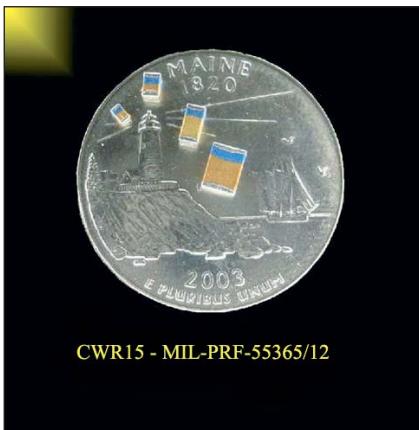

CWR15 - MIL-PRF-55365/12

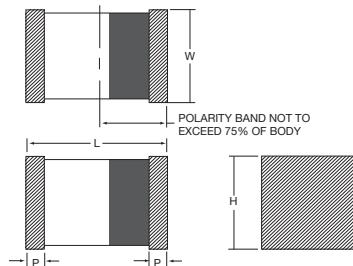

AVX announces the world's smallest military approved tantalum chip capacitors. The CWR15 offers 0603, 0805 and 1206 case sizes in capacitance/voltage combinations previously only available in much larger packages. The revolutionary AVX TACmicrochip® technology offers designers significant

opportunity to downsize circuits for military and aerospace applications. The product is manufactured in the AVX Tantalum high reliability facility in Biddeford, Maine which is also home to the CWR09, CWR11, CWR19 and CWR29 product lines.

CASE DIMENSIONS: millimeters (inches)

Case Code	Length (L)	Width (W)	Height (H)	Term. Width (W _t)
A	3.20±0.20 (0.126±0.008)	1.60±0.20 (0.063±0.008)	1.60±0.20 (0.063±0.008)	0.15+0.35/-0.00 (0.006+0.014/-0.000)
L	1.60+0.25/-0.15 (0.063+0.010/-0.006)	0.85+0.20/-0.10 (0.033+0.008/-0.004)	0.85+0.20/-0.10 (0.033+0.008/-0.004)	0.15+0.35/-0.00 (0.006+0.014/-0.000)
R	2.00+0.25/-0.15 (0.079+0.010/-0.006)	1.35+0.20/-0.10 (0.053+0.008/-0.004)	1.35+0.20/-0.10 (0.053+0.008/-0.004)	0.15+0.35/-0.00 (0.006+0.014/-0.000)

CAPACITANCE AND RATED VOLTAGE, V_R (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Voltage Rating DC (V _R) at 85°C				
µF	Code	4V (C)	6V (D)	10V (F)	15V (H)	20V (J)
0.33	334			L		L
0.47	474			L		
0.68	684			L		
1.0	105			L		
1.5	155			L		
2.2	225			L		
3.3	335		L	R		
4.7	475		L	R		
6.8	685	L	R	R		
10	106	R	R	R		
15	156	R	R	A		
22	226	R	A			
33	336	R	A			
47	476		A			
68	686	A				

Further extensions of the CWR15 product are planned for later in 2009. A new case size will be added, and the voltage range will be extended to 20 volts. Ratings of 100 µF at 4 volts to 10 µF at 20 volts will be included in this extension of the product line.


TBC Series



CWR15 MIL-PRF-55365/12 Established Reliability, COTS-Plus & Space Level

HOW TO ORDER

COTS-PLUS & MIL QPL (CWR15):

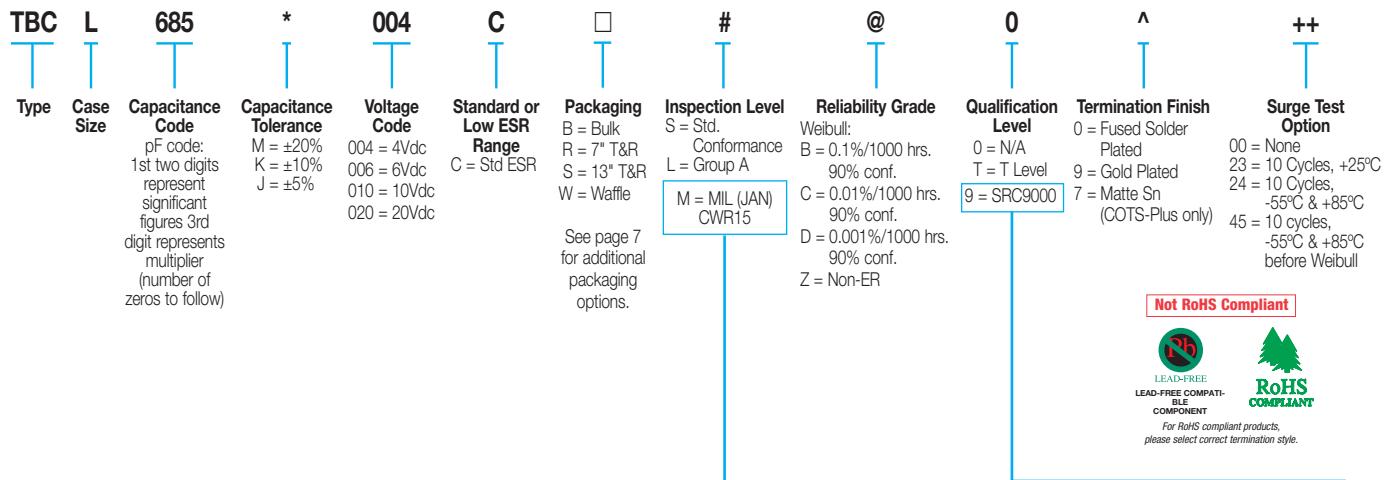

CWR15 P/N CROSS REFERENCE:

CWR15	F	C	685	*	-	L	+
Style	Voltage Code	Termination Finish	Capacitance Code	Capacitance Tolerance	Product Level Designator	Case Size	Surge Test Option
C = 4Vdc D = 6Vdc F = 10Vdc J = 20Vdc	B = Gold Plated K = Solder Fused	pF code: 1st two digits represent significant figures 3rd digit represents number of zeros to follow	pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	J = ±5% K = ±10% M = ±20%	Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf. T = T Level Z = Non-ER		A = +25°C after Weibull B = -55°C & +85°C after Weibull C = -55°C & +85°C before Weibull
							

SPACE LEVEL OPTIONS TO SRC9000*:

TBC	L	685	*	004	C	<input type="checkbox"/>	L	@	9	<input type="checkbox"/>	++
Type	Case Size	Capacitance Code	Capacitance Tolerance	Voltage Code	Standard or Low ESR Range	Packaging	Inspection Level	Reliability Grade	Qualification Level	Termination Finish	Surge Test Option
pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)			M = ±20% K = ±10% J = ±5%	004 = 4Vdc 006 = 6Vdc 010 = 10Vdc 020 = 20Vdc	C = Std ESR L = Low ESR	B = Bulk R = 7" T&R S = 13" T&R W = Waffle	L = Group A	Weibull: B = 0.1%/1000 hrs. 90% conf. C = 0.01%/1000 hrs. 90% conf. D = 0.001%/1000 hrs. 90% conf.	9 = SRC9000	0 = Fused Solder Plated 9 = Gold Plated	45 = 10 cycles, -55°C & +85°C before Weibull
											

*Contact factory for AVX SRC9000 Space Level SCD details.

TECHNICAL SPECIFICATIONS

Technical Data:	Unless otherwise specified, all technical data relate to an ambient temperature of 25°C				
Capacitance Range:	0.47 µF to 68 µF				
Capacitance Tolerance:	±5%; ±10%; ±20%				
Rated Voltage: (V _R)	≤85°C:	4	6	10	20
Category Voltage: (V _C)	125°C:	2.7	4	6.7	13.3
Surge Voltage: (V _s)	≤85°C:	5.3	8	13.3	26.7
	125°C:	3.5	5.3	8.7	17.8
Temperature Range:	-55°C to +125°C				



TBC Series

CWR15 MIL-PRF-55365/12 Established Reliability, COTS-Plus & Space Level



RATING & PART NUMBER REFERENCE				Parametric Specifications by Rating per MIL-PRF-55365/12										Typical Ripple Data by Rating							
CWR15 P/N	AVX MIL & COTS-Plus P/N	AVX SRC9000 P/N	Case	Cap @ 120Hz	DC Rated Voltage	ESR @ 100kHz	DCL max				DF Max				Power Dissipation	25°C Ripple	85°C Ripple	125°C Ripple	25°C Ripple	85°C Ripple	125°C Ripple
							μF @ 25°C	V @ +85°C	Ohms @ +25°C	(μA)	(μA)	(μA)	(%)	(%)	(%)	W	A (100kHz)	A (100kHz)	V (100kHz)	V (100kHz)	V (100kHz)
CWR15CK685^L+	TBC L 685 * 004 C □ # @ 0 ^ +	TBC L 685 * 004 C □ L @ 9 ^ +	L	6.8	4	10	0.5	5	6	8	16	12	0.025	0.05	0.05	0.02	0.50	0.45	0.20		
CWR15CK106^R+	TBC R 106 * 004 C □ # @ 0 ^ ++	TBC R 106 * 004 C □ L @ 9 ^ ++	R	10	4	6	0.5	5	6	8	16	12	0.045	0.09	0.08	0.03	0.52	0.47	0.21		
CWR15CK156^R+	TBC R 156 * 004 C □ # @ 0 ^ ++	TBC R 156 * 004 C □ L @ 9 ^ ++	R	15	4	6	0.6	6	7	8	16	12	0.045	0.09	0.08	0.03	0.52	0.47	0.21		
CWR15CK226^R+	TBC R 226 * 004 C □ # @ 0 ^ +	TBC R 226 * 004 C □ L @ 9 ^ +	R	22	4	6	0.9	9	11	8	16	12	0.045	0.09	0.08	0.03	0.52	0.47	0.21		
CWR15CK336^R+	TBC R 336 * 004 C □ # @ 0 ^ +	TBC R 336 * 004 C □ L @ 9 ^ +	R	33	4	6	1.3	13	16	10	20	15	0.045	0.09	0.08	0.03	0.52	0.47	0.21		
CWR15CK686^A+	TBC A 686 * 004 C □ # @ 0 ^ +	TBC A 686 * 004 C □ L @ 9 ^ +	A	68	4	1	2.7	27	33	15	30	23	0.040	0.20	0.18	0.08	0.20	0.18	0.08		
CWR15DK335^L+	TBC L 335 * 006 C □ # @ 0 ^ +	TBC L 335 * 006 C □ L @ 9 ^ +	L	3.3	6	10	0.5	5	6	6	12	9	0.025	0.05	0.05	0.02	0.50	0.45	0.20		
CWR15DK475^L+	TBC L 475 * 006 C □ # @ 0 ^ +	TBC L 475 * 006 C □ L @ 9 ^ +	L	4.7	6	10	0.5	5	6	8	16	12	0.025	0.05	0.05	0.02	0.50	0.45	0.20		
CWR15DK685^R+	TBC R 685 * 006 C □ # @ 0 ^ ++	TBC R 685 * 006 C □ L @ 9 ^ ++	R	6.8	6	6	0.5	5	6	8	16	12	0.045	0.09	0.08	0.03	0.52	0.47	0.21		
CWR15DK106^R+	TBC R 106 * 006 C □ # @ 0 ^ ++	TBC R 106 * 006 C □ L @ 9 ^ ++	R	10	6	6	0.6	6	7	8	16	12	0.045	0.09	0.08	0.03	0.52	0.47	0.21		
CWR15DK156^R+	TBC R 156 * 006 C □ # @ 0 ^ +	TBC R 156 * 006 C □ L @ 9 ^ +	R	15	6	6	0.9	9	11	8	16	12	0.045	0.09	0.08	0.03	0.52	0.47	0.21		
CWR15DK226^A+	TBC A 226 * 006 C □ # @ 0 ^ +	TBC A 226 * 006 C □ L @ 9 ^ +	A	22	6	6	1.4	14	17	10	20	15	0.040	0.08	0.07	0.03	0.49	0.44	0.20		
CWR15DK336^A+	TBC A 336 * 006 C □ # @ 0 ^ +	TBC A 336 * 006 C □ L @ 9 ^ +	A	33	6	6	2	20	24	10	20	15	0.040	0.08	0.07	0.03	0.49	0.44	0.20		
CWR15DK476^A+	TBC A 476 * 006 C □ # @ 0 ^ +	TBC A 476 * 006 C □ L @ 9 ^ +	A	47	6	4	2.8	28	34	15	30	23	0.040	0.10	0.09	0.04	0.40	0.36	0.16		
CWR15FK474^L+	TBC L 474 * 010 C □ # @ 0 ^ +	TBC L 474 * 010 C □ L @ 9 ^ +	L	0.47	10	12	0.5	5	6	6	12	9	0.025	0.05	0.04	0.02	0.55	0.49	0.22		
CWR15FK684^L+	TBC L 684 * 010 C □ # @ 0 ^ +	TBC L 684 * 010 C □ L @ 9 ^ +	L	0.68	10	10	0.5	5	6	6	12	9	0.025	0.05	0.05	0.02	0.50	0.45	0.20		
CWR15FK105^L+	TBC L 105 * 010 C □ # @ 0 ^ +	TBC L 105 * 010 C □ L @ 9 ^ +	L	1	10	10	0.5	5	6	6	12	9	0.025	0.05	0.05	0.02	0.50	0.45	0.20		
CWR15FK155^L+	TBC L 155 * 010 C □ # @ 0 ^ +	TBC L 155 * 010 C □ L @ 9 ^ +	L	1.5	10	10	0.5	5	6	6	12	9	0.025	0.05	0.05	0.02	0.50	0.45	0.20		
CWR15FK225^L+	TBC L 225 * 010 C □ # @ 0 ^ +	TBC L 225 * 010 C □ L @ 9 ^ +	L	2.2	10	10	0.5	5	6	6	12	9	0.025	0.05	0.05	0.02	0.50	0.45	0.20		
CWR15FK335^R+	TBC R 335 * 010 C □ # @ 0 ^ +	TBC R 335 * 010 C □ L @ 9 ^ +	R	3.3	10	6	0.5	5	6	8	16	12	0.045	0.09	0.08	0.03	0.52	0.47	0.21		
CWR15FK475^R+	TBC R 475 * 010 C □ # @ 0 ^ +	TBC R 475 * 010 C □ L @ 9 ^ +	R	4.7	10	6	0.5	5	6	8	16	12	0.045	0.09	0.08	0.03	0.52	0.47	0.21		
CWR15FK685^R+	TBC R 685 * 010 C □ # @ 0 ^ +	TBC R 685 * 010 C □ L @ 9 ^ +	R	6.8	10	6	0.7	7	8.5	8	16	12	0.045	0.09	0.08	0.03	0.52	0.47	0.21		
CWR15FK106^R+	TBC R 106 * 010 C □ # @ 0 ^ +	TBC R 106 * 010 C □ L @ 9 ^ +	R	10	10	6	1	10	12	8	16	12	0.045	0.09	0.08	0.03	0.52	0.47	0.21		
CWR15FK156^R+	TBC A 156 * 010 C □ # @ 0 ^ +	TBC A 156 * 010 C □ L @ 9 ^ +	A	15	10	6	1.5	15	18	10	20	15	0.040	0.08	0.07	0.03	0.49	0.44	0.20		
CWR15JK474^R+	TBC L 474 * 020 C □ # @ 0 ^ +	TBC L 474 * 020 C □ L @ 9 ^ +	L	0.47	20	24	0.5	5	6	6	12	9	0.025	0.03	0.03	0.01	0.77	0.70	0.31		

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.